



národní  
úložiště  
šedé  
literatury

## **Diffusion Coefficient of H<sub>2</sub>SO<sub>4</sub> in Air Laboratory Measurements Using Laminar Flow Technique**

Škrabalová, Lenka  
2014

Dostupný z <http://www.nusl.cz/ntk/nusl-175823>

Dílo je chráněno podle autorského zákona č. 121/2000 Sb.

Tento dokument byl stažen z Národního úložiště šedé literatury (NUŠL).

Datum stažení: 13.09.2024

Další dokumenty můžete najít prostřednictvím vyhledávacího rozhraní [nusl.cz](http://nusl.cz) .

# DIFFUSION COEFFICIENT OF H<sub>2</sub>SO<sub>4</sub> IN AIR LABORATORY MEASUREMENTS USING LAMINAR FLOW TECHNIQUE

Lenka ŠKRABALOVÁ<sup>1,2</sup>, David BRUS<sup>3</sup>, Vladimír ŽDÍMAL<sup>1</sup>, Eric HERMANN<sup>3</sup>

<sup>1</sup>Laboratory of Aerosol Chemistry and Physics, Institute of Chemical Process Fundamentals, Academy of Sciences of the Czech Republic, Rozvojová 135 Prague, 165 02, Czech Republic,

<sup>2</sup>Department of Physical Chemistry, Faculty of Science, Charles University in Prague, Hlavova 8 Prague, 128 43, Czech Republic

<sup>3</sup>Finnish Meteorological Institute, Erik Palménin aukio 1, P.O. Box 503, FI-00101, Helsinki, Finland  
skrabalova@icpf.cas.cz

Keywords: sulphuric acid, diffusion coefficient, modelling

## INTRODUCTION

Sulphate aerosols play an important role in atmospheric chemistry. They have indispensable impact on climate, radiation balance, and human health. In the atmosphere sulphate aerosols are formed due to secondary particle production (gas to particle conversion) from sulphuric acid and water, and participation of trace species like ammonia, amines or other condensable organics. The sulphuric acid diffusion coefficient data have wide application in atmospheric and aerosol mass transfer models.

## METHODS

The diffusion coefficient was estimated from the first-order rate coefficients for the wall loss of H<sub>2</sub>SO<sub>4</sub>. The wall losses were measured as a function of relative humidity (RH) in the range from 2 to 70 % in a laminar flow tube. The chemical ionization mass spectrometer (CIMS) was used to detect the H<sub>2</sub>SO<sub>4</sub> concentration in gas phase (Petäjä et al. 2009). The H<sub>2</sub>SO<sub>4</sub> loss measurements were carried out at three temperatures 5, 15 and 25°C and atmospheric pressure in a vertically positioned thermostated cylindrical tube with I.D. = 6 cm and length of 200 cm. The sulphuric acid vapour was generated by passing purified dry air through a temperature controlled saturator filled with 95-97 % w. t. H<sub>2</sub>SO<sub>4</sub> (Baker) and subsequently mixed with humidified air in a mixer. The vapour gas mixture was then introduced to a laminar flow tube where the H<sub>2</sub>SO<sub>4</sub> concentration was measured with CIMS at six different positions along the reactor, see Fig. 1. The wall losses were determined from the slopes of the fits to experimental data in the plot H<sub>2</sub>SO<sub>4</sub> concentration as a function of position in the tube, see Fig 2 and 3. To ensure the independence of wall losses on H<sub>2</sub>SO<sub>4</sub> concentration the measurements were carried out at different initial H<sub>2</sub>SO<sub>4</sub> concentrations (from 10<sup>6</sup> to 10<sup>8</sup> molec cm<sup>-3</sup>) and different total flow rates (8 - 11 l min<sup>-1</sup>).

## RESULTS AND CONCLUSIONS

In this study the first-order wall losses of sulfuric acid in the laminar flow tube were assumed. To test this presumption we applied the computational fluid dynamics (FLUENT Inc., version 6.2) model (Herrmann et al., 2010). The model is using the infinite

sink boundary condition on the wall together with all other parameters (initial  $[H_2SO_4]$ ,  $T$ ,  $RH$ , total flow) used in our experiment. No particle production was assumed in the model. The modelled sulphuric acid losses in the flow tube are compared with experimental values for two relative humidities ( $RH = 5\%$  and  $44\%$ ) in Fig 2 and 3. The linear fits to experimental data represent the loss rate coefficients ( $k_w$ ,  $cm^{-1}$ ). In both cases the model describes behaviour of sulfuric acid in the flow tube very well. The model predicts in average about 5 % lower values of loss rate coefficient ( $k_w$ ) than the experiment. Figure 4 shows the measured diffusion coefficients of  $H_2SO_4$  in air as a function of  $RH$  and at three temperatures 5, 15 and 25 °C. The measured points are accompanied with the fit to  $H_2SO_4 - N_2$  data at 25 °C published by Hanson and Eisele (2000). The diffusion coefficient values decreased as the  $RH$  was increased and the diffusion coefficient dependency on  $RH$  flattens in the range of  $RH = 20-70\%$ . These results show lower wall losses and slower diffusion to the wall due to strong hydration of  $H_2SO_4$  molecules (Jaeger-Voirol and Mirabel, 1988). The temperature dependency was found to be the power of 5.8 (from theory this should be 1.5) to measured diffusion coefficient when data for the whole range of  $RH$  are considered. This discrepancy is possibly due to higher order losses of  $H_2SO_4$  to bigger clusters at lower temperatures and/or presence of impurities like ammonia with subsequent ammonium-sulfate or -bisulfate creation. The calculated values of diffusion coefficient of  $H_2SO_4$  and ammonium-sulfate in dry air at 25 °C using the Fuller method (Reid et al, 1987) are  $0.11$  and  $0.091$   $cm^2$   $s^{-1}$ , respectively.

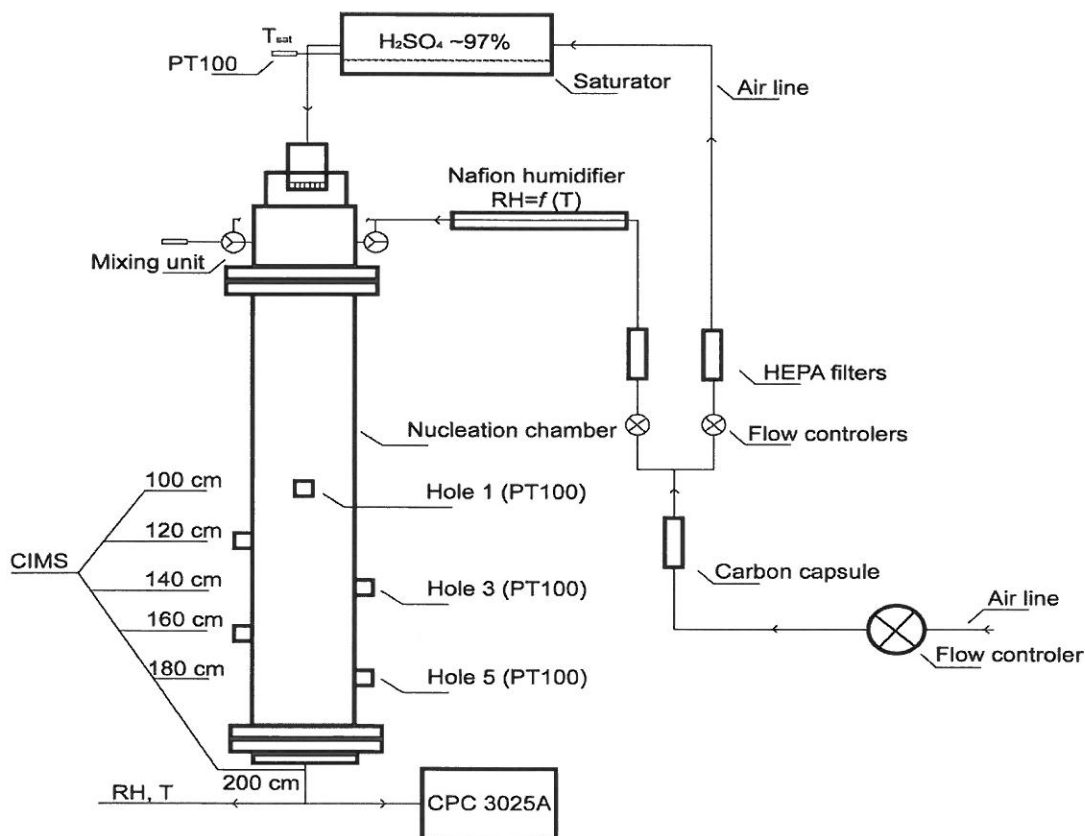


Fig. 1: Schematic figure of the FMI flow tube

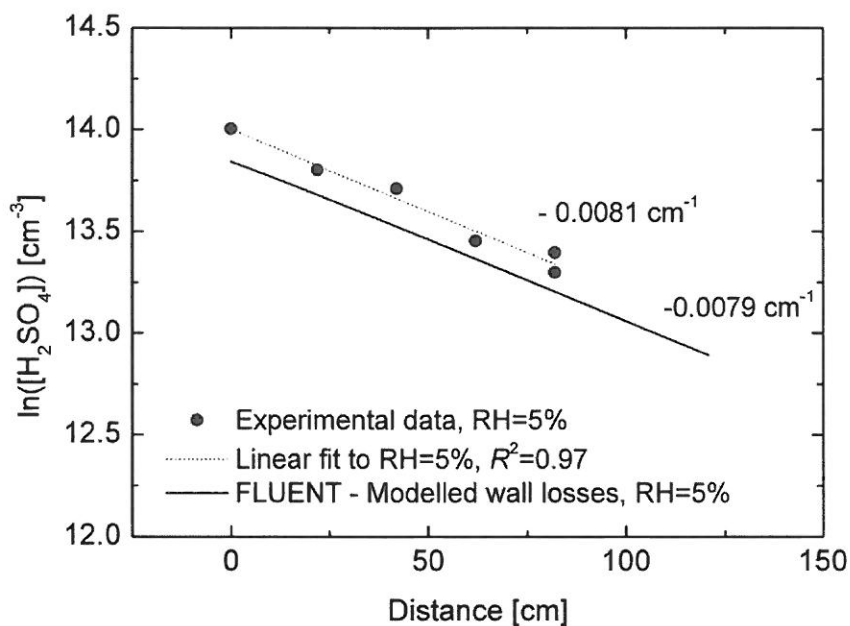


Fig. 2: Losses of sulphuric acid as a function of distance in the flow tube at relative humidity 5% at T 25°C. The wall loss rate coefficients obtained experimentally and with FLUENT modelling are indicated in figures.

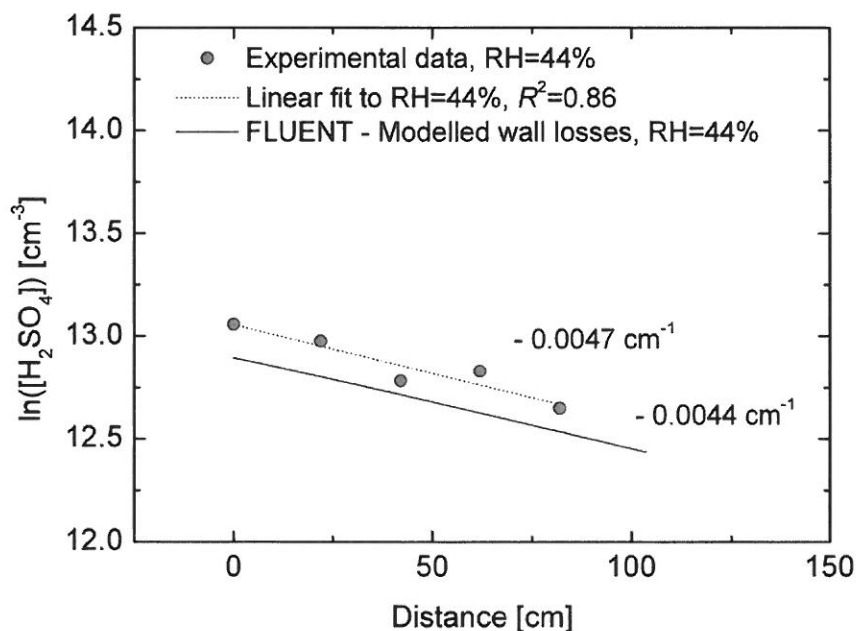


Fig. 3: Losses of sulphuric acid as a function of distance in the flow tube at relative humidity 44% at T 25°C. The wall loss rate coefficients obtained experimentally and with FLUENT modelling are indicated in figures.

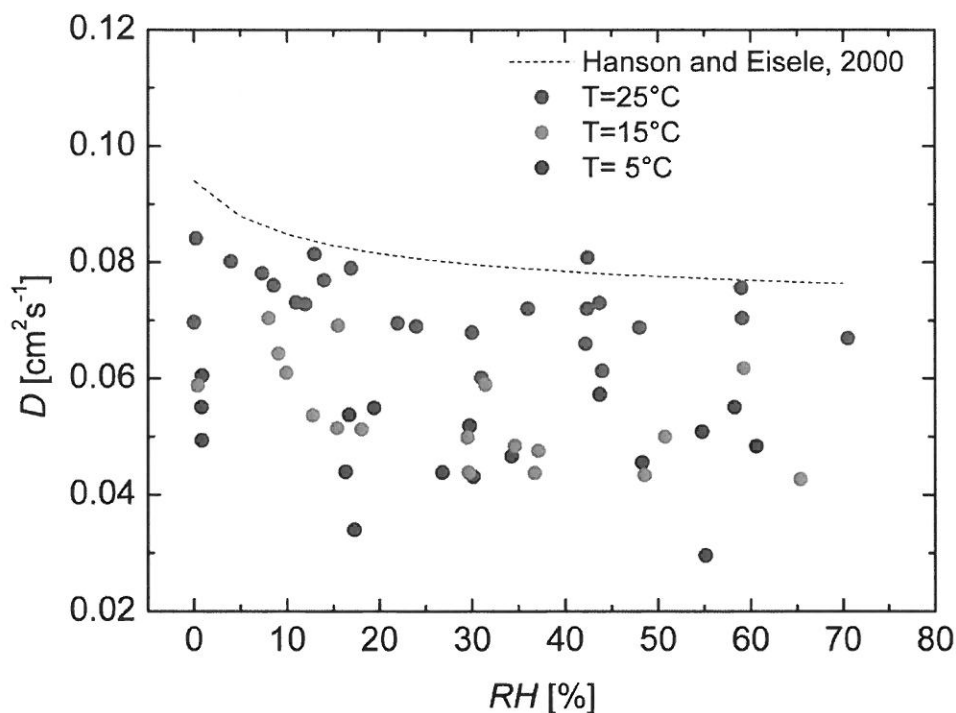


Fig. 4: Diffusion coefficient data of  $\text{H}_2\text{SO}_4$  in air as a function of relative humidity compared with fit to  $\text{H}_2\text{SO}_4$  in  $\text{N}_2$  data of Hanson and Eisele (2000).

#### ACKNOWLEDGEMENT

Authors would like to acknowledge KONE foundation, EUCAARI project (The European Integrated project on Aerosol Cloud Climate and Air Quality Interactions) and FcoE (Finnish Center of Excellence of Academy of Finland, project no. 1118615) for their financial support.

#### REFERENCES

- Petäjä, T., Mauldin, R. L., Kosciuch, E., McGrath, J., Nieminen, T., Paasonen, P., Boy, M., Adamov, A., Kotiaho, T., and Kulmala, M. (2009), *Atmos. Chem. Phys.*, 9, 7435-7448.
- Herrmann, E., Brus, D., Hyvärinen, A.-P., Stratmann, F., Wilck, M., Lihavainen, H. and Kulmala, M., *J. Phys. Chem. A*, 114 (31), 8033–8042, 2010
- Hanson, D. R. and Eisele, F. (2000). *J. Phys. Chem A* 104, 1715-1719.
- Jaeger-Voirol A., and Mirabel, P., (1988) *J. Phys. Chem.*, 92, 12.
- Reid, R. C., Prausnitz, J. M, Poling, B. E. (1987). *The Properties of Gases and Liquids*. fourth edition, Mc Graw-Hill Inc., New York.