



národní
úložiště
šedé
literatury

Potential-driven On/Off Switch Strategy for the Electrosynthesis of [7]Helicene-derived Polymers.

Žádný, Jaroslav
2017

Dostupný z <http://www.nusl.cz/ntk/nusl-369651>

Dílo je chráněno podle autorského zákona č. 121/2000 Sb.

Tento dokument byl stažen z Národního úložiště šedé literatury (NUŠL).

Datum stažení: 04.05.2024


Další dokumenty můžete najít prostřednictvím vyhledávacího rozhraní nusl.cz .

Potential-driven On/Off Switch Strategy for the Electrosynthesis of [7]Helicene-derived Polymers

Jaroslav Žádný,^{*,1} Jan Storch,¹ Tomáš Strašák,¹ Vladimír Církva,¹ Jan Hrbáč,² Ladislav Fekete,³ Jan Pokorný,³ Jiří Bulíř,³ Jan Vacek^{*,4}

¹Institute of Chemical Process Fundamentals, Czech Academy of Sciences, Rozvojova 135, 165 02 Prague 6, Czech Republic; ²Institute of Chemistry, Masaryk University, Kamenice 5, 725 00 Brno, Czech Republic; ³Institute of Physics, Czech Academy of Sciences, Na Slovance 1999/2, 182 21 Prague 8, Czech Republic; ⁴Department of Medical Chemistry and Biochemistry, Faculty of Medicine and Dentistry, Palacky University, Hnevotínska 3, 775 15 Olomouc, Czech Republic
e-mail: zadny@icpf.cas.cz

The combination of chirality and an extended π -conjugated system makes helicenes and their derivatives promising materials for circularly polarized luminescence devices, novel sensing technologies and chiral separation applications. Linking helicenes with intrinsically conductive, semiconductive or redox active polymers or introduction of functional groups modulating their physicochemical properties such as conductivity, solubility etc. can produce new materials. Therefore, this project addresses a highly important aspect of the applicability of helicene-based materials - new materials bearing thiophene and [7]helicene moiety were prepared by a potential-driven on/off switch strategy onto the surface of glassy carbon and indium tin oxide substrates. Specifically, a 3-([7]helicene-9-yl)-thiophene hybrid monomer¹ was electrooxidized in acetonitrile by cyclic voltammetry with anodic potential limits of +1.5 V or +2.5 V, resulting in a conductive and non-conductive polymer, respectively. The electrochemical findings were supplemented by microscopy investigations; UV-Vis, fluorescence and vibrational spectroscopies, ellipsometry measurements and computational chemistry. The electrodeposited polymers could be used for the further development of materials applicable in organic electronics and sensing technologies².

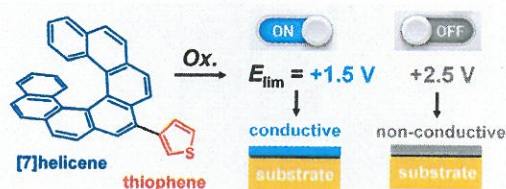

This work was supported by the Czech Science Foundation (reg. No. 17-02578S).

- 1 Hrbáč, J.; Storch, J.; Halouzka, V.; Církva, V.; Matejka, P.; Vacek, J. *RSC Adv.* **2014**, 4 (86), 46102.
- 2 Hrbáč, J.; Strašák, T.; Fekete, L.; Ladányi, V.; Pokorný, J.; Bulíř, J.; Krbal, M.; Žádný, J.; Storch, J.; Vacek, J. *ChemElectroChem* **2017**. DOI: 10.1002/celec.201700441.